




MEMBER
IOBC - MP - 1811



D&B D-U-N-S 61-736-8817



www.wolvscreeata.com

150x900MM

DESIGNS OF ELEGANT
NATURE




design elegance

The Company believes in innovating products that splash a wonder of excellence and enormity in terms of innovation and a novel approach, looking at modern times and urban requirements. With changing times, the need of customers is towards ease of use, easy maintenance, modish and bohemian feel and inventive designs, each day. With growing competition, Metro Group believes in bettering its own products on a regular basis. Coming up with ingenious wooden planks tiling solutions, the floors look sleek and splendid. With an exquisite feel of opulence and grandeur, the wooden planks tiles give a rich feel of lavishness and luxury. Bring a verve of dashing impression to your floors, choosing these marvelous tiles that revolutionize the world of flooring in its own novel way. Give room to a well-defined and hi-end form of flooring, changing the ambience of your spaces to plush panache style.




1500 x 900
mm

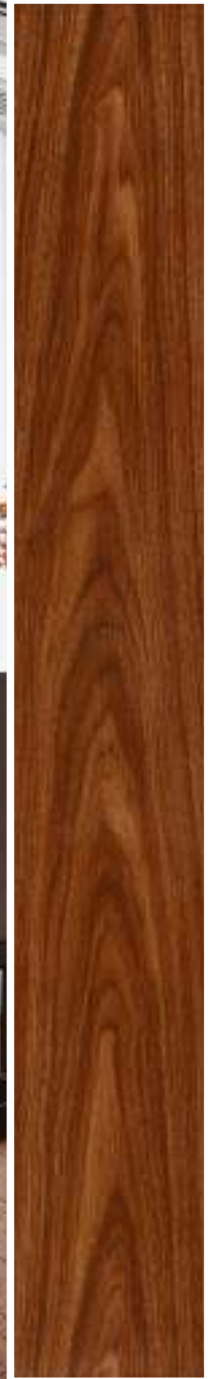

NRC-301







NRC-302



150x
900MM | **WOODEN**
PLANK TILES



-  SUITABLE FOR WALL & FLOOR
-  BRIGHT FINISHING TILES
-  RANDOM PATTERN
-  USE GROUTING FOR BETTER LAYING

design splendor


NRC-402



NRC-403



150x900MM | **WOODEN**
PLANK TILES



design
excellence

NRC-102







NRC-101



NRC-303

150x900MM | **WOODEN**
PLANK TILES







-  SUITABLE FOR WALL & FLOOR
-  BRIGHT FINISHING TILES
-  RANDOM PATTERN
-  USE GROUTING FOR BETTER LAYING

NRC-304









NRC-401

- 
 SUITABLE FOR
WALL & FLOOR
- 
 BRIGHT FINISHING
TILES
- 
 RANDOM
PATTERN
- 
 USE GROUTING FOR
BETTER LAYING



NRC-309

- 
 SUITABLE FOR
WALL & FLOOR
- 
 BRIGHT FINISHING
TILES
- 
 RANDOM
PATTERN
- 
 USE GROUTING FOR
BETTER LAYING






NRC-305




NRC-307



150x
900MM | **WOODEN**
PLANK TILES



design
poise




NRC-308



NRC-306




**150x
900MM** | **WOODEN
PLANK TILES**



design
finesse

NRC-404




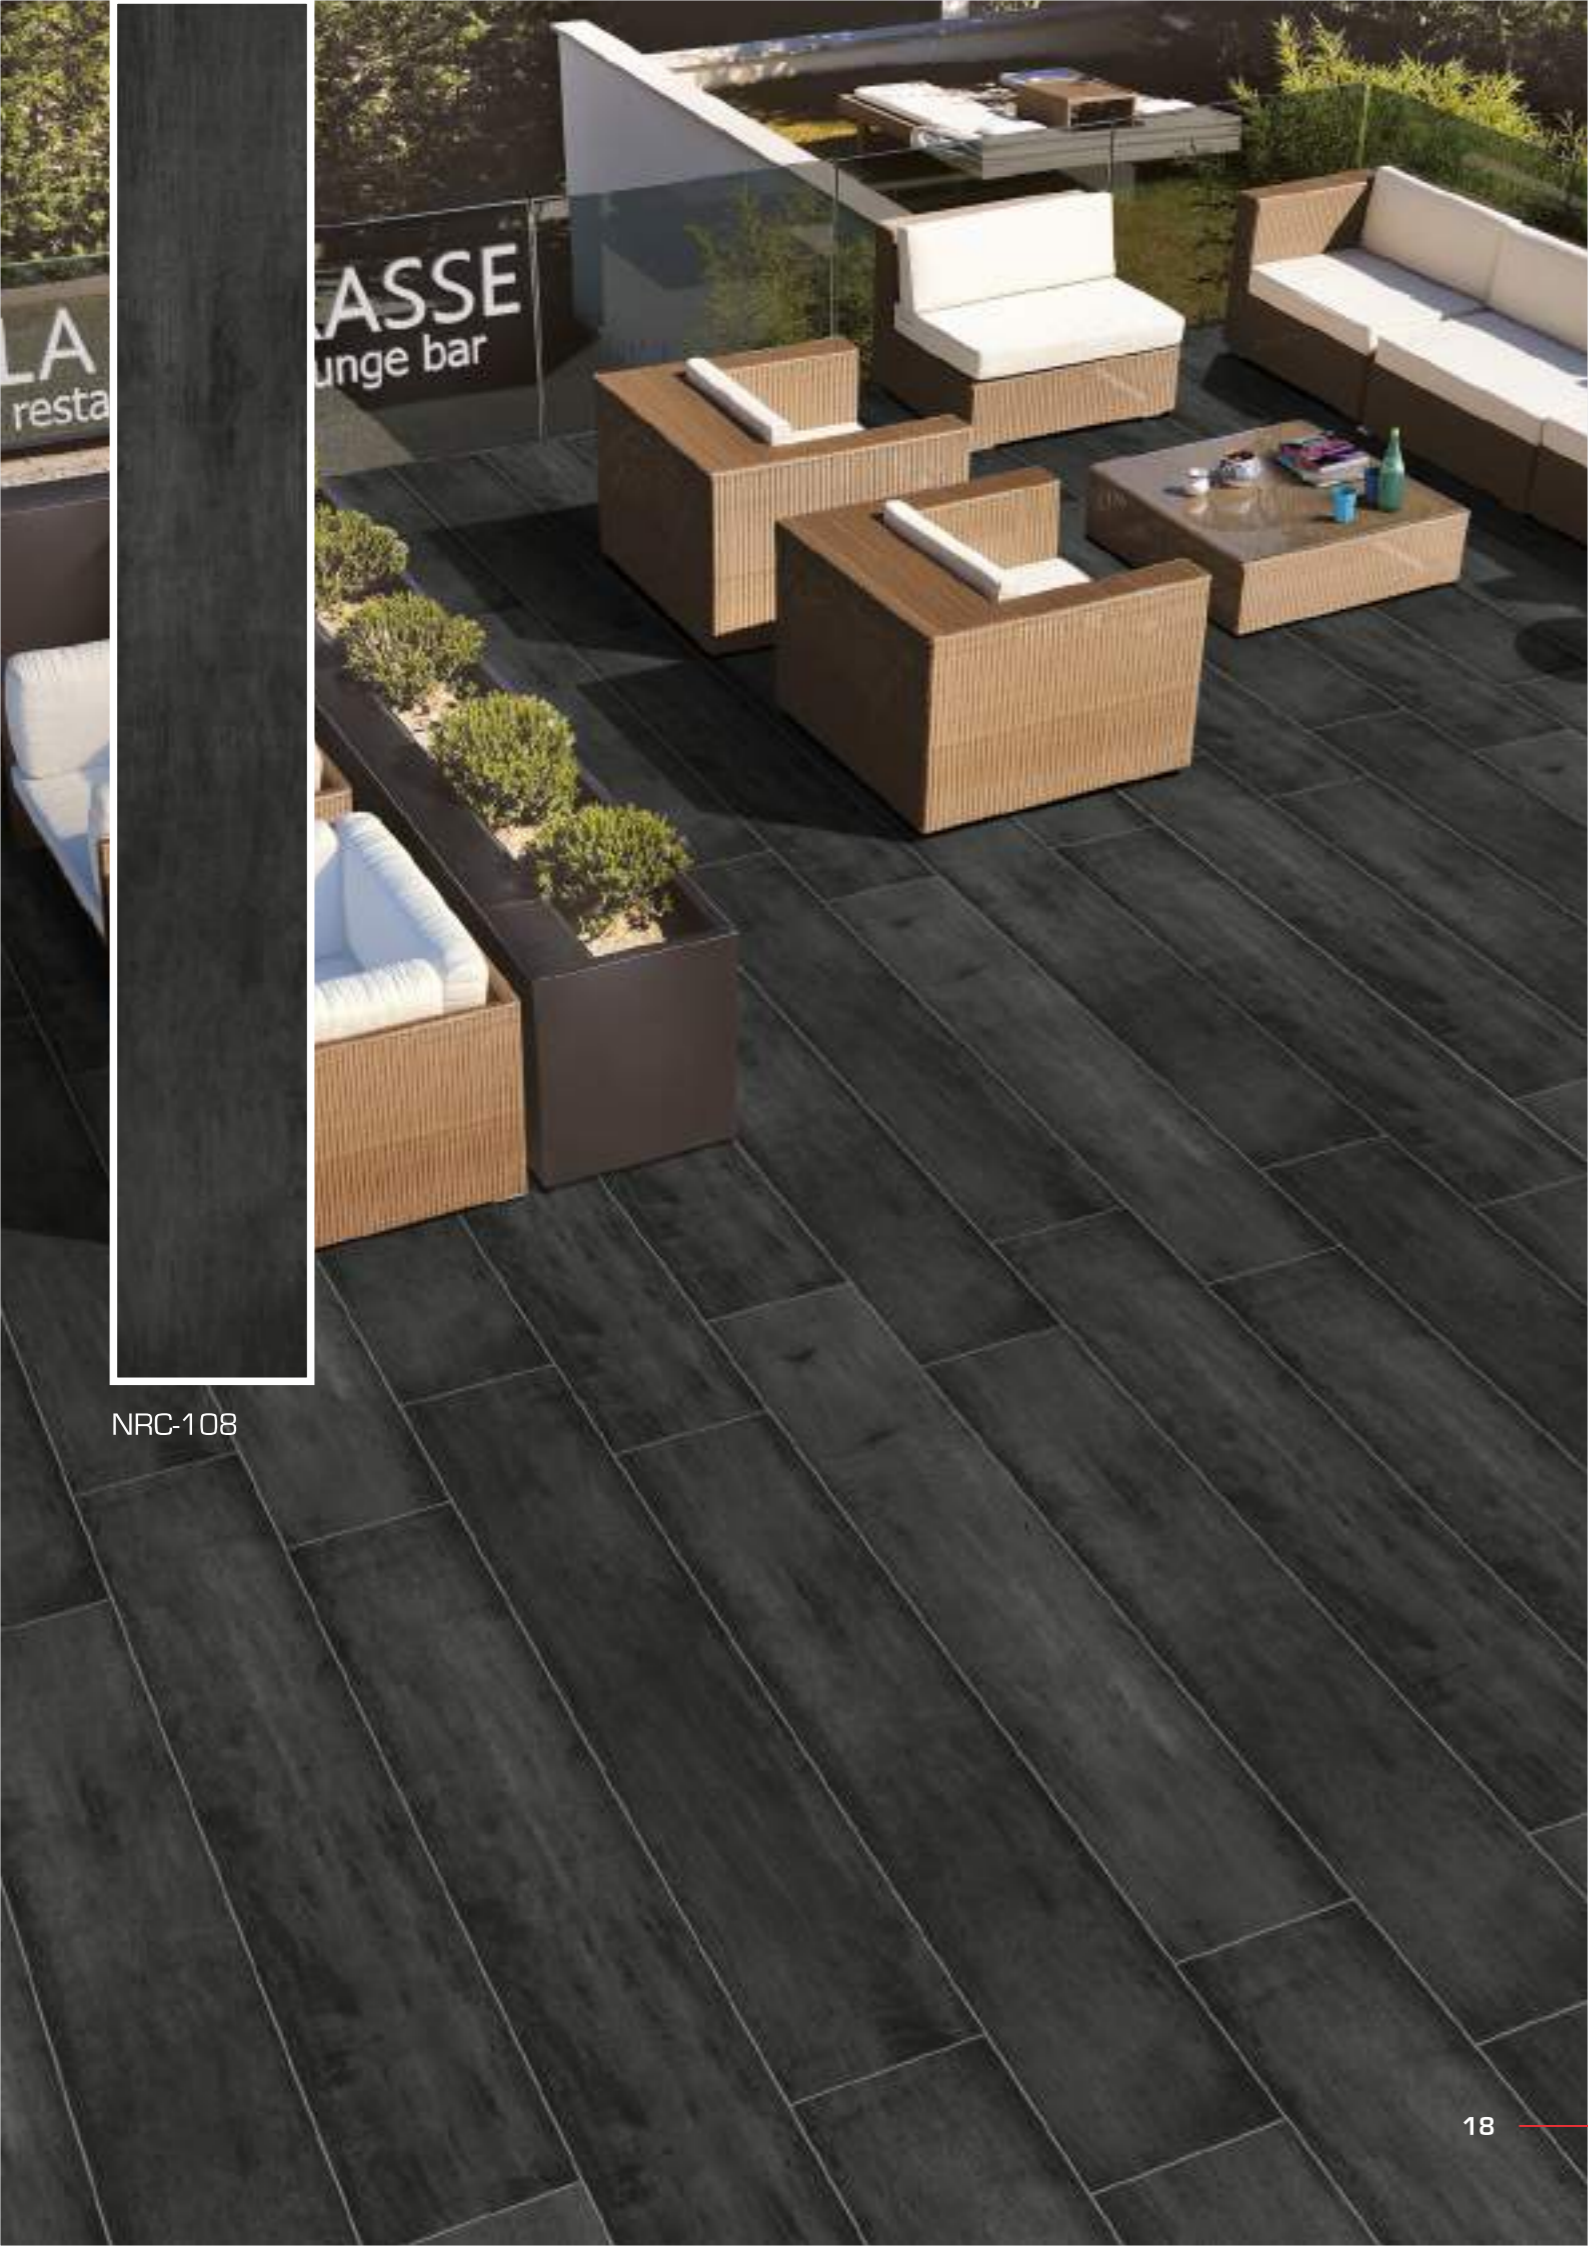


NRC-108



NRC-104



150x900MM | **WOODEN**
PLANK TILES



design
splendor





NRC-105



NRC-107



150x900MM | **WOODEN**
PLANK TILES





-  SUITABLE FOR WALL & FLOOR
-  BRIGHT FINISHING TILES
-  RANDOM PATTERN
-  USE GROUTING FOR BETTER LAYING

design
finesse

NRC-109



150x900MM | **WOODEN**
PLANK TILES

-  SUITABLE FOR WALL & FLOOR
-  BRIGHT FINISHING TILES
-  RANDOM PATTERN
-  USE GROUTING FOR BETTER LAYING

design
excellence

NRC-111



NRC-110









NRC-112

150x900MM | **WOODEN**
PLANK TILES







NRC-114

-  SUITABLE FOR WALL & FLOOR
-  BRIGHT FINISHING TILES
-  RANDOM PATTERN
-  USE GROUTING FOR BETTER LAYING









NRC-202

-  SUITABLE FOR WALL & FLOOR
-  BRIGHT FINISHING TILES
-  RANDOM PATTERN
-  USE GROUTING FOR BETTER LAYING



NRC-201

-  SUITABLE FOR WALL & FLOOR
-  BRIGHT FINISHING TILES
-  RANDOM PATTERN
-  USE GROUTING FOR BETTER LAYING



NRC-406




NRC-407

- SUITABLE FOR WALL & FLOOR
- BRIGHT FINISHING TILES
- RANDOM PATTERN
- USE GROUTING FOR BETTER LAYING

150x
900MM | **WOODEN**
PLANK TILES



design
poise



NRC-409



NRC-408







NRC-410



NRC-411



150x
900MM | **WOODEN**
PLANK TILES



design poise





NRC-501



NRC-502



150x900MM | **WOODEN**
PLANK TILES

-  SUITABLE FOR WALL & FLOOR
-  BRIGHT FINISHING TILES
-  RANDOM PATTERN
-  USE GROUTING FOR BETTER LAYING

design
excellence

NRC-602







NRC-601









NRC-603


-  SUITABLE FOR WALL & FLOOR
-  BRIGHT FINISHING TILES
-  RANDOM PATTERN
-  USE GROUTING FOR BETTER LAYING

NRC-604

-  SUITABLE FOR WALL & FLOOR
-  BRIGHT FINISHING TILES
-  RANDOM PATTERN
-  USE GROUTING FOR BETTER LAYING



150x900MM | **WOODEN**
PLANK TILES



design
finesse

NRC-605






SPECIFICATIONS

| Sr. No. | Pictogram | Property | International Std. ISO 13006/EN 176 Group | Tiles Value | Method of Testing |
|---------|-----------|---|---|----------------------|-------------------------|
| 1 | | Deviation in length | +/-0.6% | +/-0.3% | ISO 10545 Pt 2 |
| 2 | | Deviation in thickness | +/-5% | +/-3% | ISO 10545 Pt 2 |
| 3 | | Straightness of sides | +/-0.5% | +/-0.1% | ISO 10545 Pt 2 |
| 4 | | Rectangularity | +/-0.6% | +/-0.2% | ISO 10545 Pt 2 |
| 5 | | **Surface flatness | +/-0.5% | +/-0.2% | ISO 10545 Pt 2 |
| 6 | | Water absorption | < 6 - 8% | < 6 - 8% | ISO 10545 Pt 3 |
| 7 | | *Mohs hardness | >6 | >6 | EN 101 |
| 8 | | Flexural strength | >35N/mm ² | ³46N/mm ² | ISO 10545 Pt 4 |
| 9 | | Abrasion resistance | <175 mm ² | <144 mm ³ | ISO 10545 Pt 6 |
| 10 | | **Skid resistance (Friction coefficient) | >0.4 | >0.4 | ISO 10545 Pt 17 |
| 11 | | Breaking strength | 1113 N | 2800 N | ISO 10545 Pt 4 |
| 12 | | Frost resistance | Frost proof | Frost proof | ISO 10545 Pt 12 |
| 13 | | Chemical resistance | No Damage | No Damage | ISO 10545 Pt 13 |
| 14 | | Thermal shock resistance | No Damage | No Damage | ISO 10545 Pt 9 |
| 15 | | Colour resistance | No Damage | No Damage | DIN 51094 |
| 16 | | Stain resistance | Resistance | Resistance | ISO 10545-14 |
| 17 | | Moisture expansion | Nil | Nil | ISO 10545-10 |
| 18 | | **Glossiness | - | Min.80% reflection | Glossmeter |
| 19 | | Resistance to Surface Abrasion (of tiles intended for use on Floors)*** | Abrasion class shall be specified by the manufacturer | PEI Group V | ISO-10545-7 IS:13630-11 |

PACKING DETAILS

| Sr. No. | Size | No. of Tiles Per Box | Coverage Area in Sq. Feet | Approx. Weight / Box |
|---------|-----------|----------------------|---------------------------|----------------------|
| 1 | 150x900mm | 8 Pcs. | 11.62 Sq. Ft | 23.2 Kg |

APPLICATIONS



DISCLAIMER: Wooden Tiles reserves the right to delete & amend either totally or partially, any of the colors, shapes, sizes, references and other technical specifications contained in this catalogue at anytime, the colors shown of tiles in this catalogue are purely illustrative and limited to printing process. Please refer actual sample before final selection. The details of sizes, colors, references should be verified for typographical errors.



LAYING INSTRUCTIONS

TILES FIXING INSTRUCTIONS

1. All the tiles must be checked prior to fixing for quality, batch no. and choice.
2. Plaster the surface of the floor to be tiled and allow curing atleast two weeks before tiling.
3. While fixing pick tiles from various boxes alternatively, lay them in the desired patterns and make sure that they give an acceptable blend of colour and design. Please note that shade variation is inherent in manufacturing tiles.
4. For fixing tiles we recommend to use the fixing adhesives or equivalent product for the best result.
5. For fixing tiles in floor using conventional method, we suggest the following laying instruction:
A: Use cement and sand mortar in the ratio 1:4. Add water to create a consistent paste.
B: Apply 20-25MM of bedding materials over the floor area of 1.0 SQM at a time.
C: Apply a thin coat of the slurry on the back of the tile to ensure proper and full bedding. Press gently for even adherence of the tiles with surface.
Do not use any heavy materials like iron or hammer to press tile.
- 6: For fixing the tools on Dado, we recommend the use of adhesive or equivalent materials.
- 7: Allow 3-4 days of bed curing after laying tiles and later fill the joints with grout.
- 8: We recommend maintaining a joint gap of 1-2mm between the tiles to allow possible thermal expansion at later stage.
- 9: Please note that company will not accept any liability in case of any problems arising out of adherence of above fixing instructions.

DISCLAIMER : Metro reserves the right to delete and amend either totally or partially, any of the colours, shapes, sizes, references and other technical specifications contained in the catalogue at any time. The colours shown in this catalogue are purely illustrative and limited to printing process. Please refer actual samples before final selection. The details of colours, sizes and references should be verified for photography errors. SHADE & SIZE VARIATIONS are inherent characteristics of ceramics. NO COMPLAINTS SHALL BE ENTERTAINED ON TILES ALREADY FIXED.

NOTES :

- * All technical specifications in this catalogue are for premium grade materials only.
- * SHADE/SIZE VARIATION are inherent characteristics to ceramics. Certain products purposely have variations that are the parts of designs and process. The same have been indicated.
- * It is recommended to blend tiles by mixing tiles from various boxes and check for natural hue before fixing.
- * Company's liability is also limited to the material supplied by the company; no other claim is entertained under any circumstances.
- * No complaints shall be entertained regarding the decoration on tiles.

Helpful tips for better aesthetic look (Laying Instructions)

1. For better aesthetic value and for long term guarantee, use it is strongly recommended to provide 3 mm spacer in between the tiles. Without spacer, harmony of tiles might be disturbed.
 2. Make sure that the design, pattern and the arrow marked on the back side of tiles must be in the same direction.
 3. Any product from digitile must be installed (laid) in the same format. i.e. 150x900mm size. For the particular series customized size application is not possible.
- * THE COMPANY SHALL NOT BEAR ANY LIABILITY FOR THE PROBLEMS OUT OF NON-FULFILLMENT OF LAYING THE INSTRUCTIONS AS ABOVE.

